

Reflection seismic 1 script

Educational Material

Author(s):

Kruk, Jan van der

Publication date:

2001

Permanent link:

<https://doi.org/10.3929/ethz-a-004363847>

Rights / license:

[In Copyright - Non-Commercial Use Permitted](#)

Seismic Velocities

Important for :

Conversion from travelttime to depth

Check of results by modelling


Imaging of the data (migration)

Classification and Filtering of Signal and Noise

Predictions of the Lithology

Aid for geological Interpretation

Bulk modulus

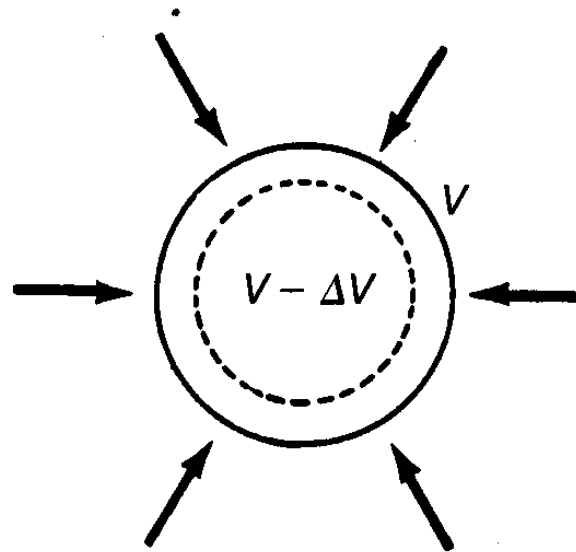

(d) Bulk contraction


$$K = \frac{\text{volume stress}}{\text{volume strain}} \\ = \frac{P(\text{pressure})}{\Delta V/V}$$

Bulk modulus:

$$k = \frac{1}{\kappa} = \frac{\Delta P}{\Delta V / V}$$

κ = compressibility

Shear modulus

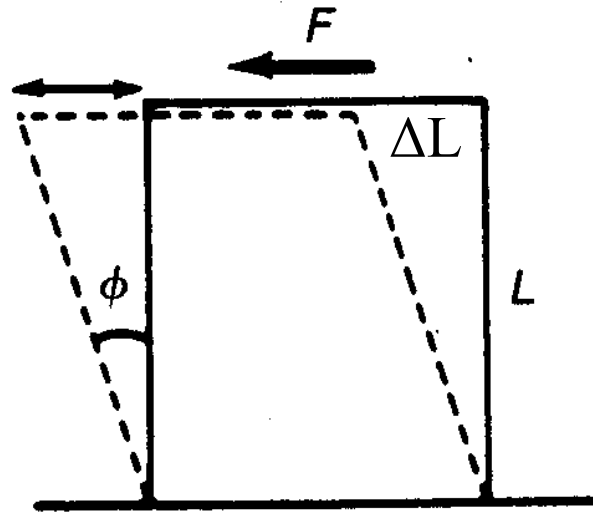

$$\begin{aligned}\mu &= \frac{\text{shear stress}}{\text{shear strain}} \\ &= \frac{F/A}{\tan \phi} = \frac{F/A}{\Delta L/L}\end{aligned}$$

(c) Shear


Shear modulus:

$$\mu = \frac{\tau}{\tan \theta}$$

τ is the shear stress

The shear modulus μ is zero for fluids and gaseous media

Poissons ratio

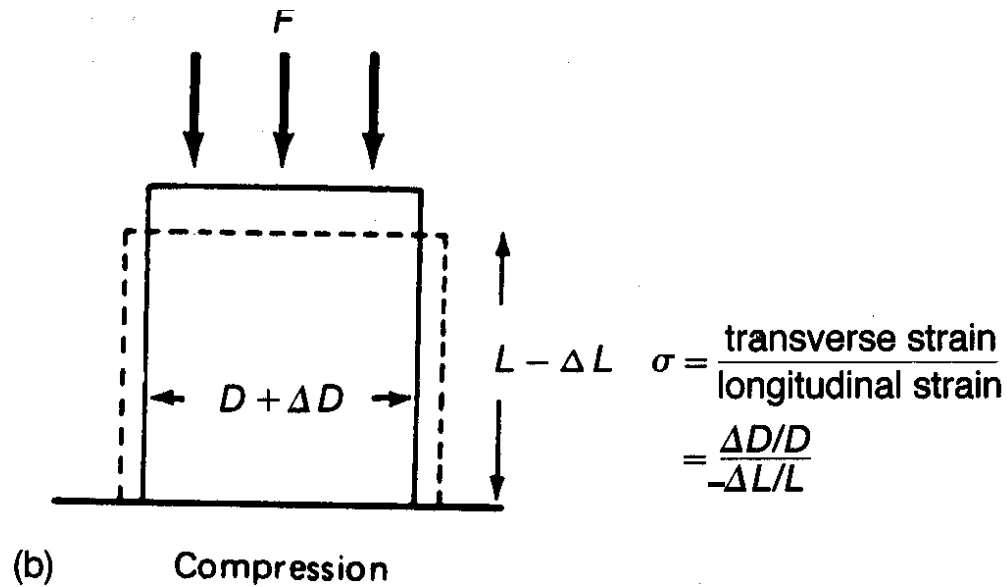


Poisson's ratio varies from 0 to $\frac{1}{2}$.

Poisson's ratio has the value $\frac{1}{2}$ for fluids

$$\sigma = \frac{3k - 2\mu}{2(3k + \mu)}$$

Young's modulus

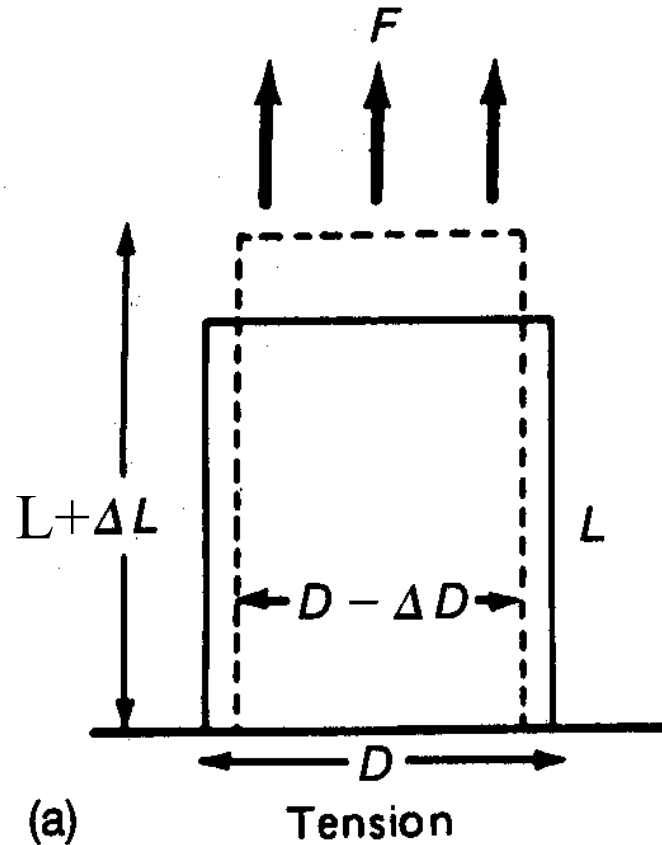

$$E = \frac{\text{longitudinal stress}}{\text{longitudinal strain}}$$
$$= \frac{F/A}{\Delta L/L}$$

$$E = \frac{9k\mu}{3k + \mu}$$

Seismic Velocities in a homogeneous medium

$$v_p = \sqrt{\frac{k + \frac{4\mu}{3}}{\rho}} = \sqrt{\frac{\lambda + 2\mu}{\rho}}$$

$$v_s = \sqrt{\frac{\mu}{\rho}}$$

μ = Shear modulus

k = Bulk modulus

ρ = mass density

λ = Lamé's lambda constant

$$\lambda = k - \frac{2}{3}\mu$$

Ratio V_p and V_s

$$\frac{V_s}{V_p} = \sqrt{\frac{0.5 - \sigma}{1 - \sigma}}$$

$$\sigma = \frac{3k - 2\mu}{2(3k + \mu)}$$

Seismic Velocity

ρ , μ and k depend on:

Matrix und Structure of the stone

Lithology

Porosity

Porefilling (Interstitial fluid)


Pressure (Depth)

Temperature

Degree of Compaction


...

Seismic Velocity depending on rock properties

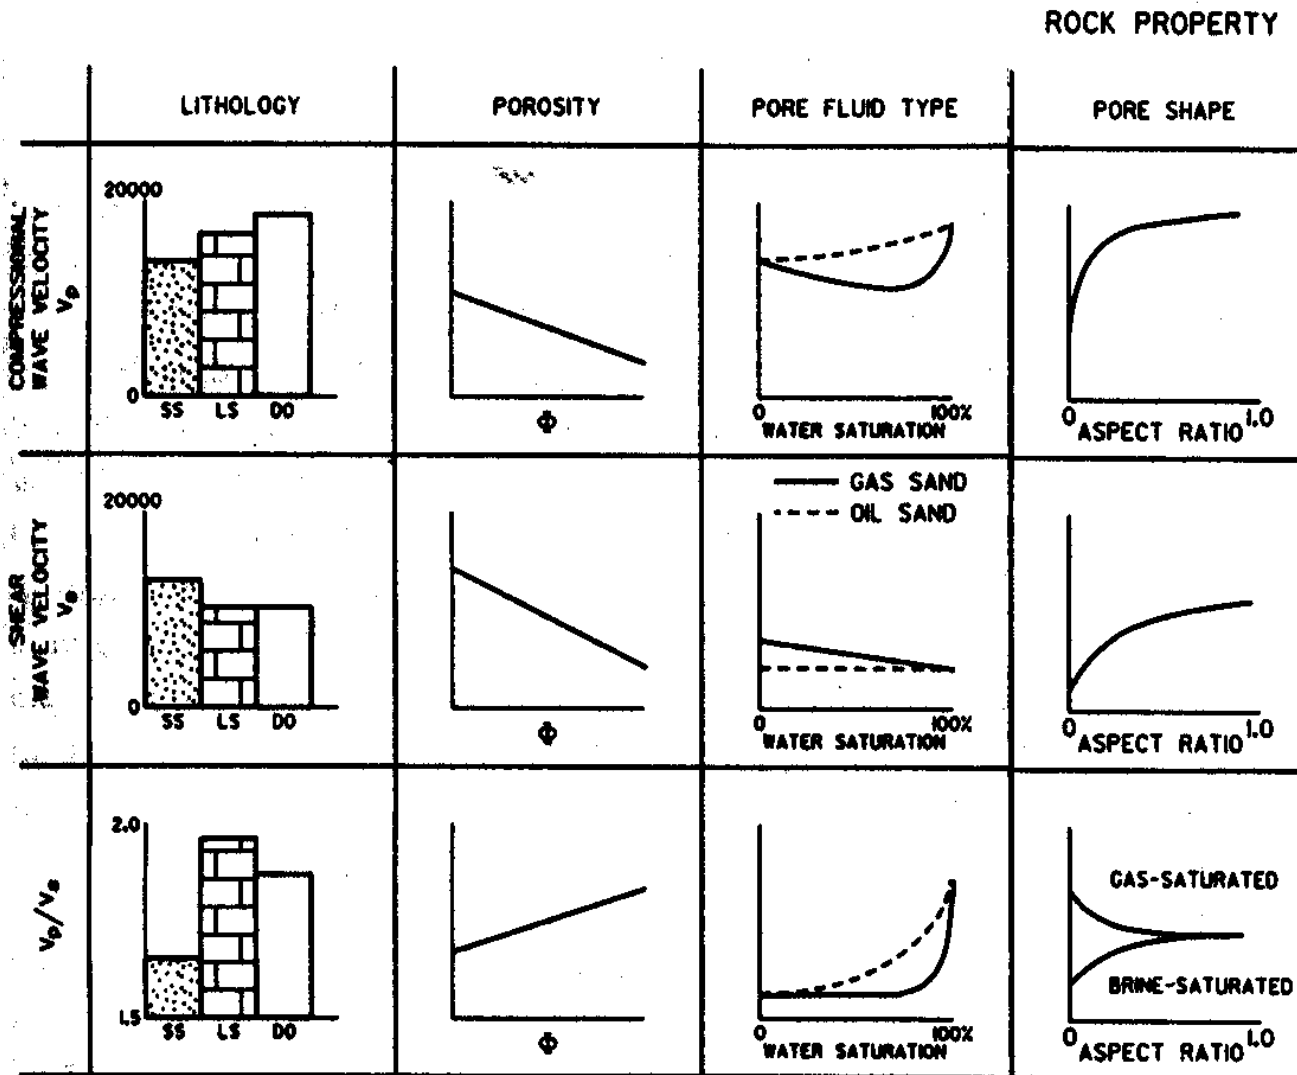

(Sheriff und Geldard, 1995)

ROCK PROPERTY

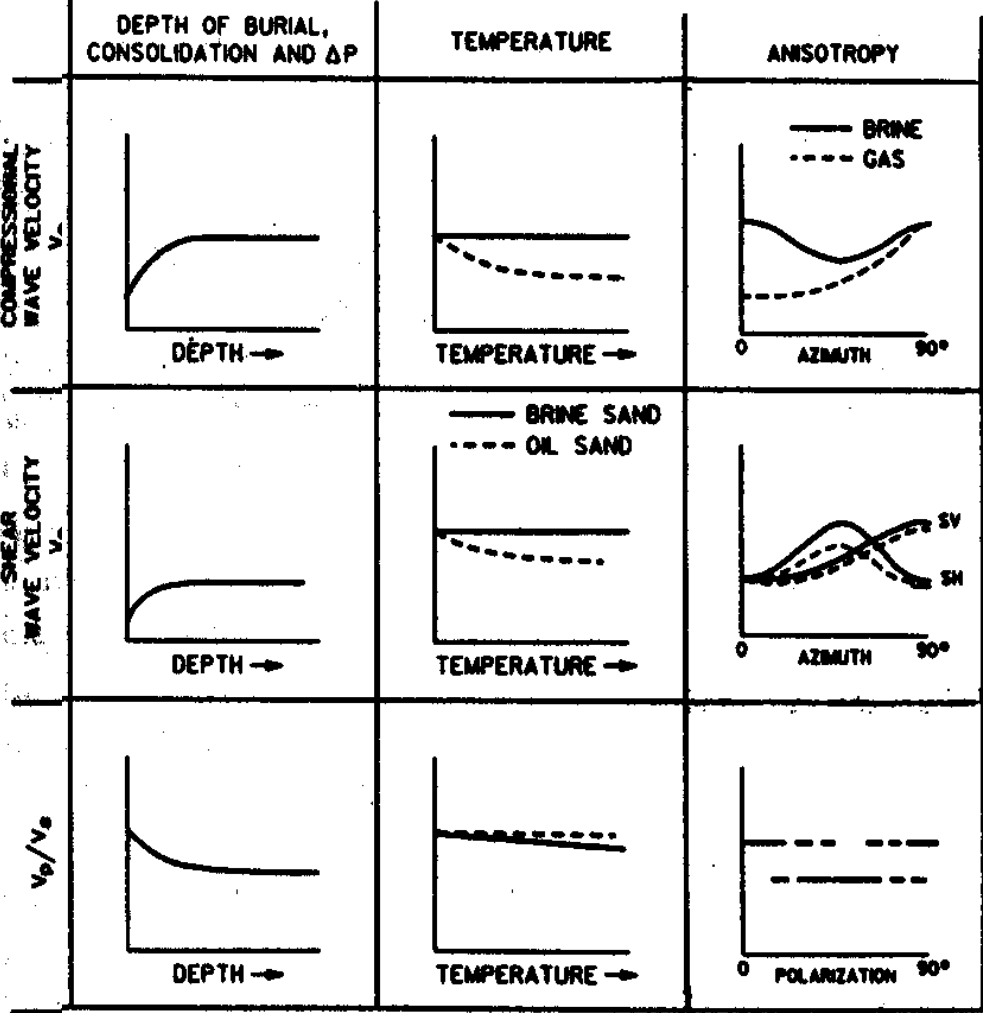


P-wave velocities v_p for different material in (km/s)


<u>Unconsolidated Material</u>	
Sand (dry)	0.2 - 1.0
Sand (water saturated)	1.5 - 2.0
Clay	1.0 - 2.5
Glacial till (water saturated)	1.5 - 2.5
Permafrost	3.5 - 4.0
<u>Sedimentary rocks</u>	
Sandstone	2.0 - 6.0
Tertiary sandstone	2.0 - 2.5
Pennant sadstone (Carboiferous)	4.0 - 4.5
Cambrian quartzite	5.5 - 6.0
Limestones	2.0 - 6.0
Cretaceous chalk	2.0 - 2.5
Jurassic oolites and bioclastic limstones	3.0 - 4.0
Carbiniferous limestone	5.0 - 5.5
Dolomites	2.5-6.5
Salt	4.5 - 5.0
Anhydrite	4.5 - 6.5
Gypsum	2.0 - 3.5

P-wave velocities v_p for different material in (km/s)

<u>Igneous / Metamorphic rocks</u>	
Granite	5.5 - 6.0
Gabbro	6.5 - 7.0
Ultramfic rocks	7.5 - 8.5
Serpentinite	5.5 - 6,5
<u>Pore fluids</u>	
Air	0.3
Water	1.4 - 1.5
Ice	3.4
Petroleum	1.3 - 1.4
<u>Other materials</u>	
Steel	6.1
Iron	5.8
Aluminium	6.6
Concrete	3.6

Velocity (km/s)

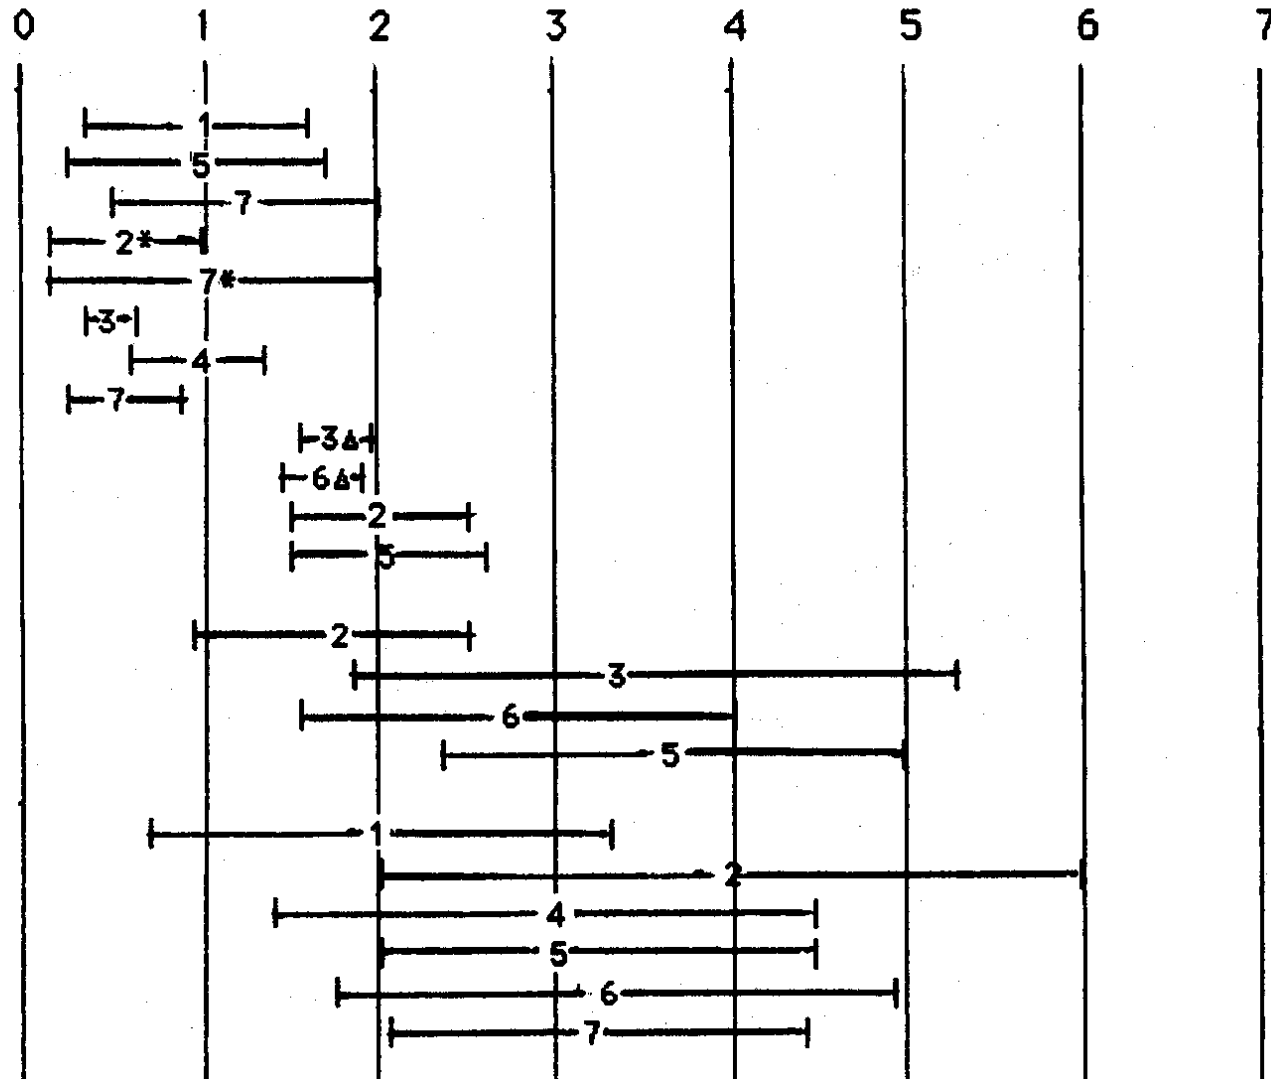

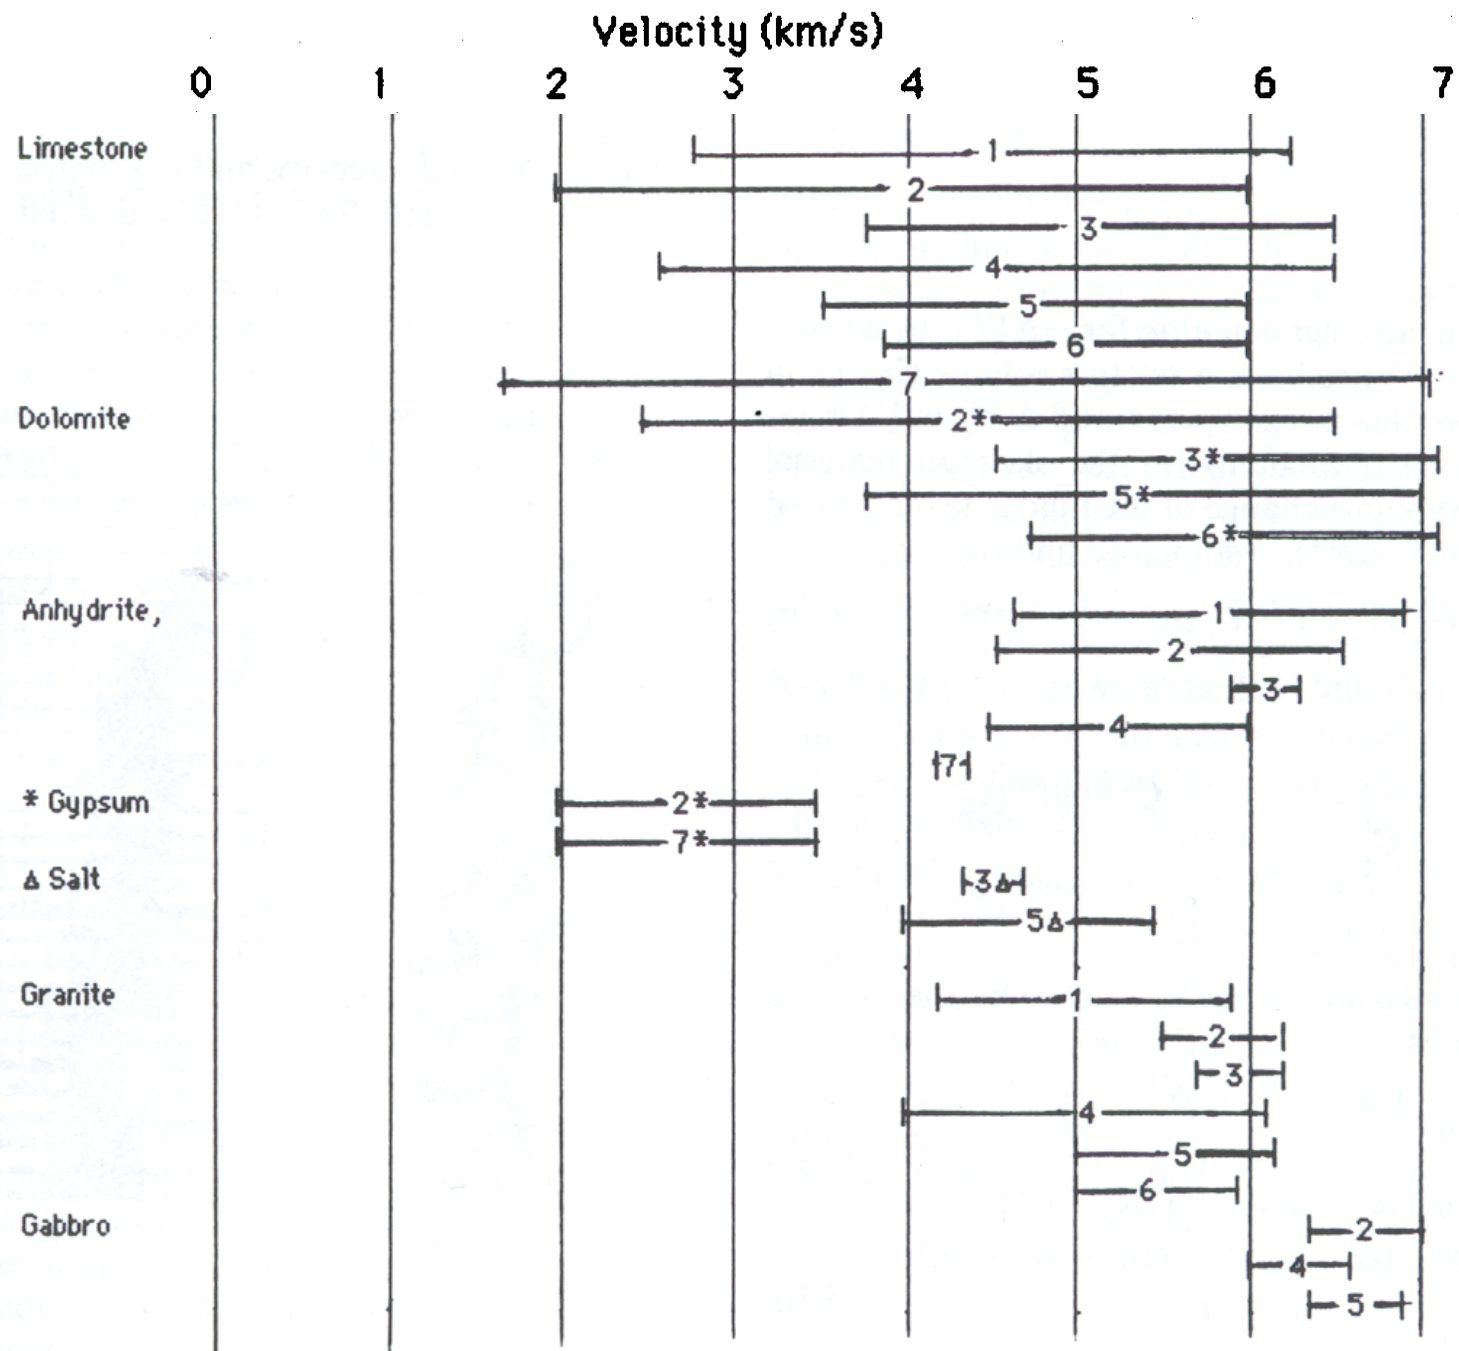

Interval-Velocity

$$V_I = \frac{Z_m - Z_n}{t_m - t_n}$$

Instantaneous Velocity

$$V_{\text{inst}} = \frac{dz}{dt}$$


Average-Velocity

$$V_{av} = \frac{\sum_{i=1}^n z_i}{\sum_{i=1}^n t_i} = \frac{\sum_{i=1}^n v_i \Delta t_i}{\sum_{i=1}^n t_i}$$

RMS-Velocity

$$V_{rms}^2 = \frac{\sum_{i=1}^n v_i^2 \Delta t_i}{\sum_{i=1}^n t_i}$$

Several horizontal layers

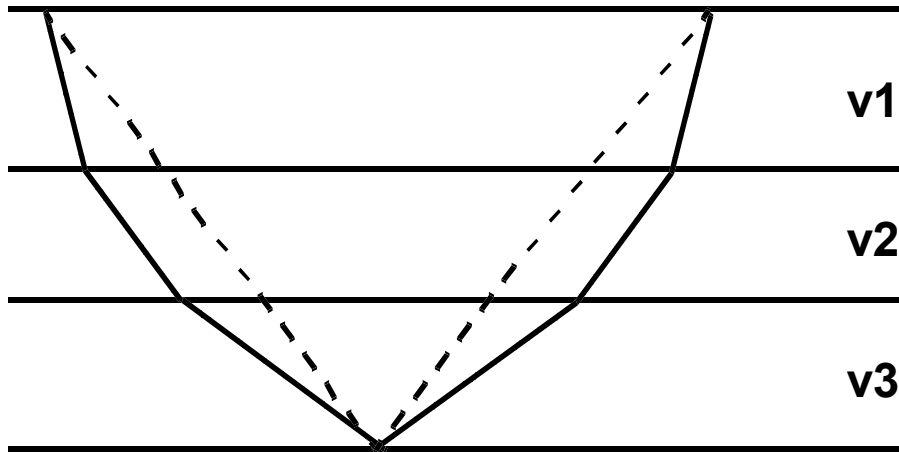


$$V_{rms}^2 = \frac{\sum_{i=1}^n v_i^2 \Delta t_i}{\sum_{i=1}^n t_i}$$

rms = root-mean-square


Dix' Formula

Conversion from v_{rms} in interval velocities

$$V_{int} = \sqrt{\left[\frac{(V_{RMS,n})^2 t_n - (V_{RMS,n-1})^2 t_{n-1}}{t_n - t_{n-1}} \right]}$$

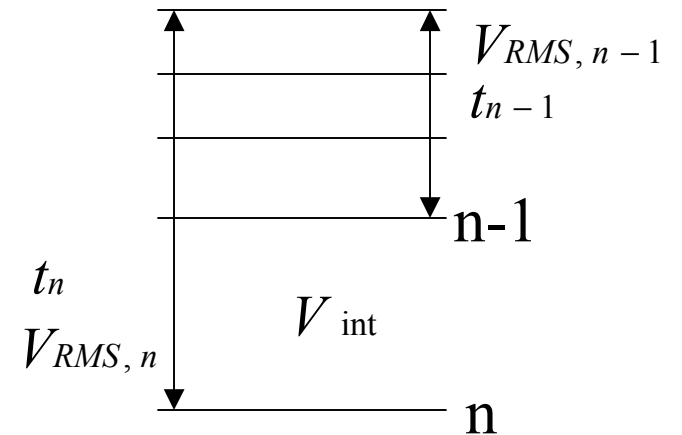

Anisotropy

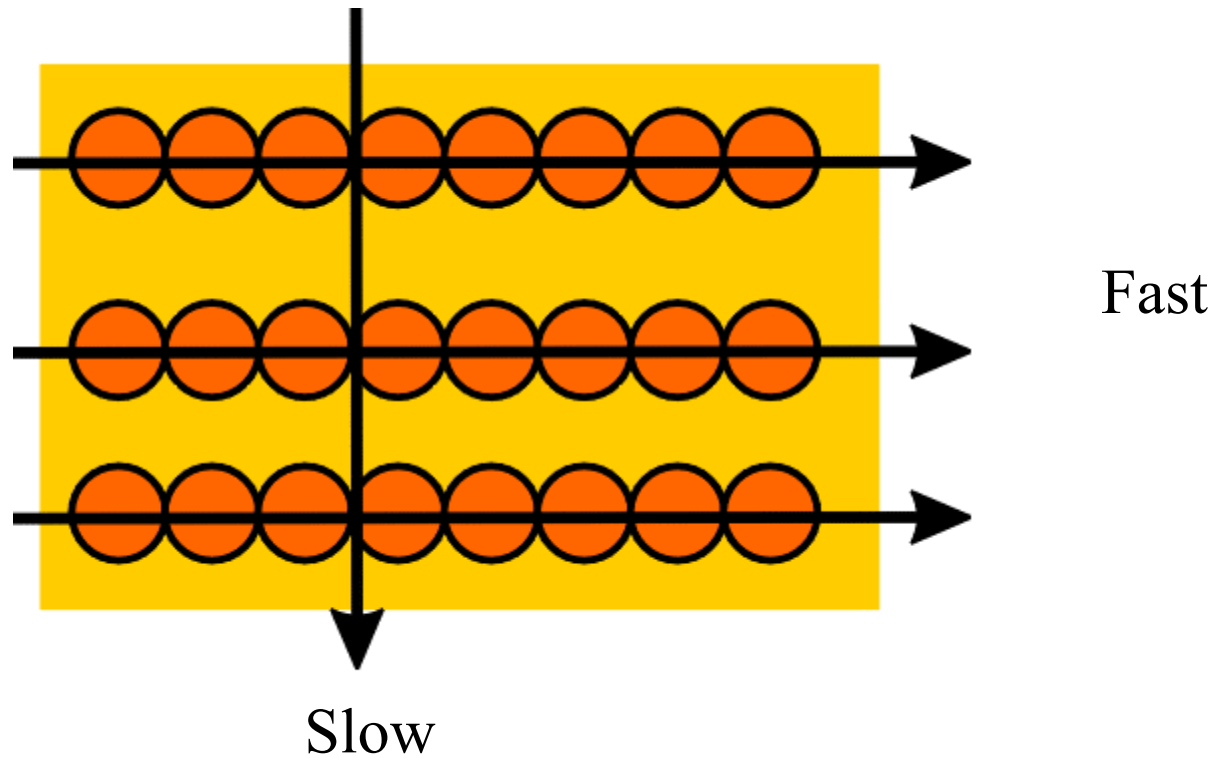

Anisotropy(seismic): Variation of seismic velocity depending on the direction in which it is measured.

Measurements of velocities

Laboratory measurements using probes

Borehole measurements

Refraction seismic

Analysis of Reflection hyperbolas